

AD 748187

DEVELOPMENT OF A FINITE ELEMENT MODEL
FOR THE CLASS IV FLEXTENSIONAL
UNDERWATER TRANSDUCER SHELL

BY

GEORGE GEORGOPOULOS
DEPARTMENT OF MECHANICAL AND AEROSPACE ENGINEERING
CENTER FOR ACOUSTICAL STUDIES
NORTH CAROLINA STATE UNIVERSITY
RALEIGH, NORTH CAROLINA

LARRY H. ROYSTER
DEPARTMENT OF MECHANICAL AND AEROSPACE ENGINEERING
CENTER FOR ACOUSTICAL STUDIES
NORTH CAROLINA STATE UNIVERSITY
RALEIGH, NORTH CAROLINA


TECHNICAL REPORT NO. 23

Reproduced by
NATIONAL TECHNICAL
INFORMATION SERVICE
U S Department of Commerce
Springfield VA 22151

SEPTEMBER, 1972

DISTRIBUTION STATEMENT A

Approved for public release;
Distribution Unlimited

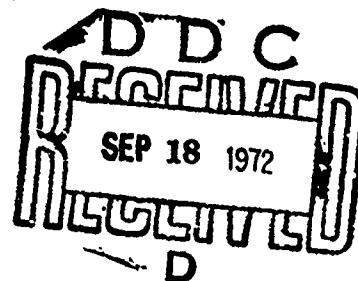

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) Center For Acoustical Studies Mechanical and Aerospace Engineering Department NCSU, Raleigh, N. C. 27607		2a. REPORT SECURITY CLASSIFICATION	
		2b. GROUP	
3. REPORT TITLE Development of a Finite Element Model for the Class IV Flextensional Underwater Transducer Shell			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Technical Report 1972			
5. AUTHOR(S) (Last name, first name, initial) Royster, Larry H. Georgopoulos, George			
6. REPORT DATE September, 1972		7a. TOTAL NO. OF PAGES 2	7b. NO. OF REFS 6
8a. CONTRACT OR GRANT NO. NOMR. 486 (11)		8a. ORIGINATOR'S REPORT NUMBER(S)	
A. PROJECT NO. NR 185-551			
c.		8b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.			
10. AVAILABILITY/LIMITATION NOTICES Unlimited			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY	
13. ABSTRACT			
<u>ABSTRACT</u>			
<p>A finite element model is developed for the Class IV flextensional underwater transducer shell. The stiffness and mass matrices for a finite cylindrical type shell element of linearly varying radius of curvature are presented. The element has 36 degrees of freedom corresponding to the nine generalized coordinates $u, v, w, \frac{\partial u}{\partial x}, \frac{\partial v}{\partial x}, \frac{\partial w}{\partial x}$ at each node. All six rigid body modes for the element are adequately represented by this model. The element is used to predict the free vibrations for the Class IV flextensional underwater transducer shell, and the results are verified experimentally.</p>			

KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Vibrations						
Class IV						
Flextensional						
Finite Element						
Eigenvalues						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.

ABSTRACT

A finite element model is developed for the Class IV flextensional underwater transducer shell. The stiffness and mass matrices for a finite cylindrical type shell element of linearly varying radius of curvature are presented. The element has 36 degrees of freedom corresponding to the nine generalized coordinates $u, v, w, \frac{\partial u}{\partial x}, \frac{\partial v}{\partial x}, \frac{\partial w}{\partial x}, \frac{\partial u}{\partial y}, \frac{\partial v}{\partial y}, \frac{\partial w}{\partial y}$ at each node. All six rigid body modes for the element are adequately represented by this model. The element is used to predict the free vibrations for the Class IV flextensional underwater transducer shell, and the results are verified experimentally.

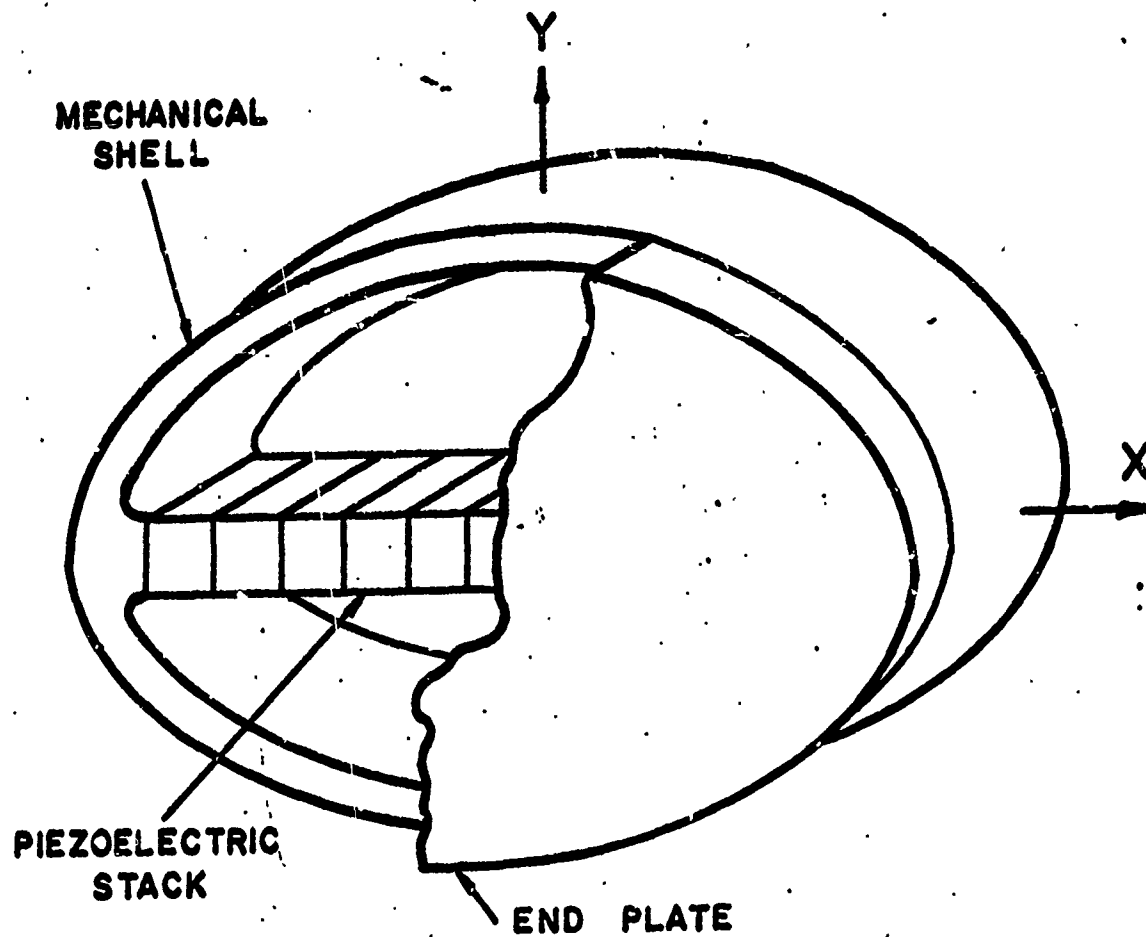


Figure 1. Components of Class IV

INTRODUCTION

The purpose of this investigation is to develop a finite element model for the Class IV flextensional underwater transducer shell. A picture of a Class IV transducer is shown in Figure 1. The Class IV flextensional transducer design was originally proposed as having possible applications as a sonobuoy transducer. A finite difference model of the Class IV transducer has been derived by Rutledge and Royster (1), (2), and (3). Due to the fact that plate effects were neglected by Rutledge and Royster, an attempt is made to develop a more complete and accurate analytical model. This paper describes such an improved linear analytical model developed for the calculation of axisymmetric modes of vibration and natural frequencies of a cylindrical type (oval) shell.

A finite element technique is utilized to construct the total shell stiffness and mass matrix by subdividing the shell into a set of axisymmetric shell components. Novozhilov's "Thin Shell Theory" (4) is utilized for describing the state of strains and stresses. The stiffness and mass matrices for the shell are obtained by superposition of the stiffness and mass matrices of the individual shell element (5) which are computed by using a Ritz approach. The superposition technique assures displacement compatibility and force equilibrium at the interface between components. After the systems for stiffness and mass matrices have been formulated, displacement boundary conditions are introduced by removing appropriate rows and columns corresponding to points on the shell which are rigidly restrained from motion. The shell's natural frequencies and node shapes are obtained from the eigenvalue equation

constructed with the total stiffness and mass matrices.

$$[[K] - \omega^2 [M]]\{\delta\} = \{0\}$$

in which ω is the circular frequency of the system and $\{\delta\}$ is the modal vector where the nine generalized coordinate component of each node for all nodal points are represented.

ANALYTICAL MODEL

Displacement function


As pointed out on page 22 of reference (5), the first requirement of a finite element is that it must be capable of undergoing rigid body motions with little or no strain. Hence, the cylindrical type shell element will require special displacement functions in order to ensure that all six rigid body modes are included. First, it is clear that the twelve term polynomial in x and y used for the plate bending element may be used here for the radial, circumferential, and meridional displacements w, v, u (figure 2).

$$u(x,y) = a_1 + a_2x + a_3y + a_4xy + a_5x^2 + a_6y^2 + a_7x^2y + a_8xy^2 + a_9x^3 + a_{10}y^3 + a_{11}x^3y + a_{12}xy^3 \quad (1)$$

$$v(x,y) = a_{13} + a_{14}x + a_{15}y + a_{16}xy + a_{17}x^2 + a_{18}y^2 + a_{19}x^2y + a_{20}xy^2 + a_{21}x^3 + a_{22}y^3 + a_{23}x^3y + a_{24}xy^3 \quad (2)$$

$$w(x,y) = a_{25} + a_{26}x + a_{27}y + a_{28}xy + a_{29}x^2 + a_{30}y^2 + a_{31}x^2y + a_{32}xy^2 + a_{33}x^3 + a_{34}y^3 + a_{35}x^3y + a_{36}xy^3 \quad (3)$$

The 36 constants in equation (1) to (3) are determined as functions of the 36 modal displacements $u_i, v_i, w_i, u_{xi}, v_{xi}, w_{xi}, u_{yi}, v_{yi}, w_{yi}, (i=1,4)$ for the element $(w_{xi} = \frac{\partial w_i}{\partial x}, \text{etc})$. These are then substituted back in equations (1) to (3) yielding expressions which completely define the displacement anywhere on the element in terms of the modal displacements.

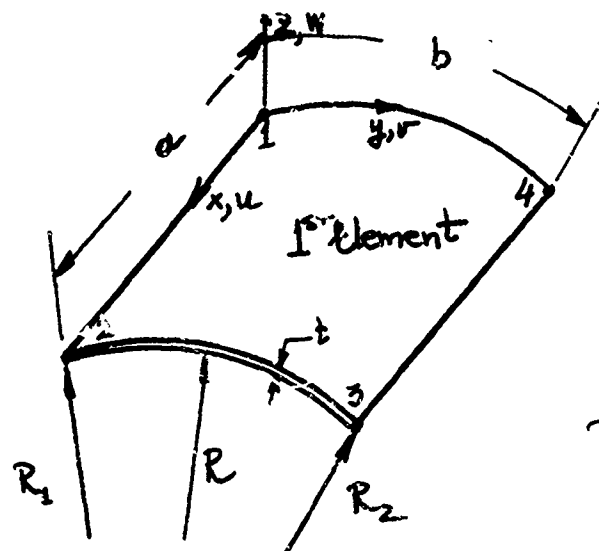

$$R = R_1 + (R_2 - R_1) \cdot \frac{y}{b}$$

Figure 2
Finite element of the shell element of linearly varying radius of curvature

Point 1	$x=0, y=0$	$u_1 = u(0,0), v_1 = v(0,0), w_1 = w(0,0), u_{x1} = u_x(0,0), v_{x1} = v_x(0,0), w_{x1} = w_x(0,0), u_{y1} = u_y(0,0), v_{y1} = v_y(0,0), w_{y1} = w_y(0,0).$
Point 2	$x=a, y=0$	$u_2 = u(a,0), v_2 = v(a,0), w_2 = w(a,0), u_{x2} = u_x(a,0), v_{x2} = v_x(a,0), w_{x2} = w_x(a,0), u_{y2} = u_y(a,0), v_{y2} = v_y(a,0), w_{y2} = w_y(a,0).$
Point 3	$x=a, y=b$	$u_3 = u(a,b), v_3 = v(a,b), w_3 = w(a,b), u_{x3} = u_x(a,b), v_{x3} = v_x(a,b), w_{x3} = w_x(a,b), u_{y3} = u_y(a,b), v_{y3} = v_y(a,b), w_{y3} = w_y(a,b).$
Point 4	$x=0, y=b$	$u_4 = u(0,b), v_4 = v(0,b), w_4 = w(0,b), u_{x4} = u_x(0,b), v_{x4} = v_x(0,b), w_{x4} = w_x(0,b), u_{y4} = u_y(0,b), v_{y4} = v_y(0,b), w_{y4} = w_y(0,b).$

Therefore, the 36 constants are determined easily from the above stated 36 equations.

$$a_1 = 1 \cdot u_1, a_2 = 1 \cdot u_{x1}, a_3 = 1 \cdot u_{y1},$$

$$a_4 = -\frac{1}{ab} \cdot u_1 - \frac{1}{b} u_{x1} - \frac{1}{a} u_{y1} + \frac{1}{ab} u_2 + \frac{1}{a} u_{x2} - \frac{1}{ab} u_3 + \frac{1}{ab} u_4 + \frac{1}{b} u_{x4}$$

$$a_5 = -\frac{3}{a^2} u_1 - \frac{2}{a} u_{x1} + \frac{3}{a^2} u_2 - \frac{1}{a} u_{x2}$$

$$a_6 = -\frac{3}{b^3} u_1 - \frac{2}{b} u_{y1} + \frac{3}{b^3} u_4 - \frac{1}{b} u_{y4}$$

$$a_7 = \frac{3}{a^3 b} u_1 + \frac{2}{a b} u_{x1} - \frac{3}{a^3 b} u_2 + \frac{1}{a b} u_{x2} + \frac{3}{a^3 b} u_3 - \frac{1}{a b} u_{x3} - \frac{3}{a^3 b} u_4 + \frac{2}{a b} u_{x4}$$

$$a_8 = \frac{3}{a^3 b} u_1 + \frac{2}{a b} u_{x1} - \frac{3}{a^3 b} u_2 + \frac{2}{a b} u_{x2} + \frac{3}{a^3 b} u_3 - \frac{1}{a b} u_{x3} - \frac{3}{a^3 b} u_4 + \frac{2}{a b} u_{x4}$$

$$a_9 = \frac{2}{b^3} u_1 + \frac{1}{b} u_{y1} - \frac{2}{b^3} u_2 + \frac{1}{b} u_{y2}$$

$$a_{10} = \frac{2}{b^3} u_1 + \frac{1}{b} u_{y1} - \frac{2}{b^3} u_4 + \frac{1}{b} u_{y4}$$

$$a_{11} = -\frac{2}{a^3 b} u_1 - \frac{1}{a b} u_{x1} + \frac{2}{a^3 b} u_2 - \frac{1}{a b} u_{x2} - \frac{2}{a^3 b} u_3 + \frac{1}{a b} u_{x3} + \frac{2}{a^3 b} u_4 + \frac{1}{a b} u_{x4}$$

$$a_{12} = -\frac{2}{a^3 b} u_1 - \frac{1}{a b} u_{x1} + \frac{2}{a^3 b} u_2 - \frac{1}{a b} u_{x2} - \frac{2}{a^3 b} u_3 + \frac{1}{a b} u_{x3} + \frac{2}{a^3 b} u_4 - \frac{1}{a b} u_{x4}$$

Due to symmetry if a_i , where $1 \leq i \leq 12$ is given by a function f_i :

$$a_i = f_i(u_1, u_{x1}, u_{y1}, u_2, u_{x2}, u_{y2}, u_3, u_{x3}, u_{y3}, u_4, u_{x4}, u_{y4})$$

then

$$a_{i+12} = f_i(v_1, v_{x1}, v_{y1}, v_2, v_{x2}, v_{y2}, v_3, v_{x3}, v_{y3}, v_4, v_{x4}, v_{y4})$$

and

$$a_{i+24} = f_i(w_1, w_{x1}, w_{y1}, w_2, w_{x2}, w_{y2}, w_3, w_{x3}, w_{y3}, w_4, w_{x4}, w_{y4})$$

The element with 4 nodes 1, 2, 3, and 4 thus possesses 36 degrees of freedom, determined by the element displacements.

$$\{\delta\}^e = \begin{Bmatrix} \delta_1 \\ \delta_2 \\ \delta_3 \\ \delta_4 \end{Bmatrix} \quad \text{where} \quad \{\delta_1\} = \begin{Bmatrix} u_1 \\ v_1 \\ w_1 \\ u_{x1} \\ v_{x1} \\ w_{x1} \\ u_{y1} \\ v_{y1} \\ w_{y1} \end{Bmatrix} \quad \text{etc.}$$

The displacement within the element is uniquely determined by the nodal displacements $\{\delta\}^e$ and the position x and y .

$$\begin{Bmatrix} u \\ v \\ w \end{Bmatrix} = [N] \cdot \{\delta\}^e$$

where matrix $[N]$ is given in Appendix A.

Strains and Stresses

From Novoshilov's "Thin Shell Theory" (4), the strains and stresses for the thin orthotropic shell and for the case of an arbitrary radius of curvature shell is as follows

Strains

$$\epsilon_x = \frac{\partial u}{\partial x} - z \frac{\partial^2 w}{\partial x^2}$$

$$\epsilon_y = \frac{\partial v}{\partial y} + \frac{w}{R} - z \left(\frac{\partial^2 w}{\partial y^2} - \frac{1}{R} \frac{\partial v}{\partial y} + \frac{v}{R^2} \frac{\partial R}{\partial y} \right)$$

$$\epsilon_{xy} = \frac{\partial v}{\partial x} + \frac{\partial u}{\partial y} - 2z \left(\frac{\partial^2 w}{\partial x \partial y} - \frac{1}{R} \frac{\partial v}{\partial x} \right)$$

Stresses

$$\sigma_x = \frac{E}{1-\nu^2} \cdot (\epsilon_x + \nu \epsilon_y)$$

$$\sigma_y = \frac{E}{1-\nu^2} \cdot (\epsilon_y + \nu \epsilon_x)$$

$$\sigma_{xy} = \frac{E}{2(1+\nu)} \cdot \epsilon_{xy}$$

A general elastic behavior is assumed, and the relationship between stresses $\{\sigma\}$ and strains $\{\epsilon\}$ is linear and of the form

$$\{\sigma\} = \begin{Bmatrix} \sigma_x \\ \sigma_y \\ \sigma_{xy} \end{Bmatrix} = [D] \cdot \begin{Bmatrix} \epsilon_x \\ \epsilon_y \\ \epsilon_{xy} \end{Bmatrix}$$

where $[D]$ is the elastic matrix containing the appropriate material properties and is given in Appendix A.

Since matrix $[N]$ is already calculated,
then

$$\{\epsilon\} = \begin{Bmatrix} \epsilon_x \\ \epsilon_y \\ \epsilon_{xy} \end{Bmatrix} = [B] \{\delta\}^e$$

Matrix $[B]$ is easily obtained and is given in Appendix A.

The stiffness matrix becomes

$$[K]^e = \int_{-\frac{1}{2}}^{\frac{1}{2}} \int_0^b \int_0^a [B]^T [D] [B] dx dy dz$$

and the mass matrix becomes

$$[m]^e = \rho \int_{-\frac{1}{2}}^{\frac{1}{2}} \int_0^b \int_0^a [N]^T [N] dx dy dz$$

where ρ is the density of the shell.

A 5 point Gauss-Legendre numerical integration is carried out through the use of an IBM 370/165 computer (6). The stiffness and mass matrices of the element will clearly always be square and of the form

$$[K]^e = \begin{bmatrix} K_{11} & K_{12} & K_{13} & K_{14} \\ K_{21} & K_{22} & K_{23} & K_{24} \\ K_{31} & K_{32} & K_{33} & K_{34} \\ K_{41} & K_{42} & K_{43} & K_{44} \end{bmatrix}, \quad [m]^e = \begin{bmatrix} m_{11} & m_{12} & m_{13} & m_{14} \\ m_{21} & m_{22} & m_{23} & m_{24} \\ m_{31} & m_{32} & m_{33} & m_{34} \\ m_{41} & m_{42} & m_{43} & m_{44} \end{bmatrix}$$

in which k_{11}, k_{12}, \dots etc. and m_{11}, m_{12}, \dots etc. are submatrices which are again square and of the size 9×9 . Then the total stiffness $[K]$ and total mass $[M]$ of the shell are obtained by proper superposition of the above mentioned submatrices. That is

$$[K]_{n \times n} = \sum_{m=1}^{m=n} \left(\sum [k_{im}] \right) \quad [M]_{n \times n} = \sum_{m=1}^{m=n} \left(\sum [m_{im}] \right)$$

The "inside" summation is now taken over all the elements of the shell. If a particular element does not in fact include the node in question, it will contain no submatrices with an i suffix, and therefore, its contribution will simply be zero.

After introducing the boundary conditions to both matrices $[K]$ and $[M]$ by removing the appropriate columns and rows from them, then the problem is reduced to the simple form

$$[[K] - \omega^2 [M]] \{ \delta \} = \{ 0 \}$$

If the $[K]$ and $[M]$ matrices are of order $n \times n$, then different values of the angular frequency ω can be computed, and each of these frequencies will be associated with a particular node vector $\{ \delta \}$ which also can be computed by utilizing a digital computer (6).

DISCUSSION

The approach adopted here is known as the displacement formulation which is equivalent to the minimization of the total potential energy of the system in terms of a prescribed displacement field. If this displacement field is defined in a suitable way, then convergence to the correct result must occur. The process is the equivalent to the Ritz procedure, and as a consequence, the so obtained approximate solution is always an upper bound to the exact solution which is very much desired. It should be emphasized that this bound is not available for a solutions in which discontinuity at interfaces arises (5).

The major characteristics of the presented analytical model formulation are: 1) an accurate representation of the shell geometry, 2) the dynamic mass matrix representation, and 3) the requirement of rigid body displacements.

The model described herein has been utilized to calculate eigenvalues and eigenvectors of the Class IV flextensional underwater transducer shell (6). Using a mesh of 6 elements as described in reference (6), the first natural frequency (1295.25 cycles/sec.) is calculated within 3.62% as compared to the experimental value (1250 cycles/sec). Using a mesh of 8 elements (4×2) the first natural frequency (1289.73 cycles/sec.) is calculated within 3.17% from the experimental value. This clearly indicates the accuracy and rapid convergence of the herein developed finite element model.

REFERENCES

1. James R. Rutledge and Larry H. Royster, "An Approximate Mathematical Model for the Free Vibrations of a Smooth Arc of Arbitrary Shape and Varying Cross-Section", Technical Report No. 17, Department of Mechanical and Aerospace Engineering, Center for Acoustical Studies, North Carolina State University, Raleigh, N.C., July 1972.
2. James R. Rutledge and Larry H. Royster, "Mathematical Model for the Class IV Flexensional Underwater Acoustic Transducer", Paper presented at the Eighty-first Meeting of the Acoustical Society of America, Washington, D.C., April 20-23, 1971.
3. James R. Rutledge and Larry H. Royster, "A Fortran Program for Calculating the Free Vibrational Frequencies and Mode Shapes For a Smooth Arc of Arbitrary Shape and Varying Cross-Section", Technical Report No. 18, Department of Mechanical and Aerospace Engineering, Center for Acoustical Studies, North Carolina State University, Raleigh, N.C. July 1971.
4. Novozhilov, V. V., "Thin Shell Theory", P. Noordhoff LTD, Gronington, The Netherlands, 1964.
5. Zienkiewicz, C. C. "The Finite Element Method in Structural and Continuum Mechanics", McGraw-Hill Publishing Company Limited, 1967.
6. Georgopoulos, George, and L. H. Royster, "A Fortran Program for Calculating The Frequencies and Mode Shapes of an Arbitrary Shape Cylindrical Type Shell By Utilizing a Finite Element Solution," Technical Report No. 24 Department of Mechanical and Aerospace Engineering, North Carolina State University, Raleigh, N.C. September, 1972.

APPENDIX A

$$D = \frac{E}{1-\nu^2} \begin{bmatrix} 1 & \nu & 0 \\ \nu & 1 & 0 \\ 0 & 0 & (1-\nu)/2 \end{bmatrix}$$

Reproduced from
best available copy.

Also $\frac{\partial u}{\partial z} = \frac{1}{a} \cdot \frac{\partial u}{\partial (\frac{x}{a})} = \frac{1}{a} \cdot \frac{\partial u}{\partial X}$, $\frac{\partial u}{\partial y} = \frac{1}{b} \cdot \frac{\partial u}{\partial Y}$, $X = \frac{x}{a}$, $Y = \frac{y}{b}$

$$[N] = \begin{bmatrix} N(1,1), N(1,2), \dots, N(1,35), N(1,36) \\ N(2,1), N(2,2), \dots, N(2,35), N(2,36) \\ N(3,1), N(3,2), \dots, N(3,35), N(3,36) \end{bmatrix}$$

$$[B] = \begin{bmatrix} B(1,1), B(1,2), \dots, B(1,35), B(1,36) \\ B(2,1), B(2,2), \dots, B(2,35), B(2,36) \\ B(3,1), B(3,2), \dots, B(3,35), B(3,36) \end{bmatrix}$$

where

$$[H] = p \cdot t \cdot a \cdot b \cdot \int_0^1 \int_0^1 [N]^T \cdot [N] \cdot dX \cdot dY$$

$$[K] = \frac{E}{1-\nu^2} \cdot a \cdot b \cdot \int_{-1/2}^{1/2} \int_0^1 \int_0^1 [B]^T \cdot [D] \cdot [B] \cdot dX \cdot dY \cdot dz$$

$$R = R_1 + (R_2 - R_1) \frac{y}{b}, \quad \frac{\partial R}{\partial y} = (R_2 - R_1) / b$$

$$N(1,1) = N(2,2) = N(3,3) = 1 - XY - 3X^2 - 3Y^2 + 3X^2Y + 3XY^2 + 2X^3 + 2Y^3 - 2X^3Y - 2XY^3$$

$$N(1,4) = N(2,5) = N(3,6) = a(X - XY - 2X^2 + 2X^2Y + X^3 - X^3Y)$$

$$N(1,7) = N(2,8) = N(3,9) = b(Y - XY - 2Y^2 + 2XY^2 + Y^3 - XY^3)$$

$$N(1,10) = N(2,11) = N(3,12) = XY + 3X^2 - 3X^2Y - 3XY^2 - 2X^3 + 2X^3Y + 2XY^3$$

$$N(1,13) = N(2,14) = N(3,15) = a(-X^2 + X^2Y + X^3 - X^3Y)$$

$$N(1,16) = N(2,17) = N(3,18) = b(XY - 2XY^2 + XY^3)$$

$$N(1,19) = N(2,20) = N(3,21) = -XY + 3X^2Y + 3XY^2 - 2X^3Y - 2XY^3$$

$$N(1,22) = N(2,23) = N(3,24) = a(-X^2Y + X^3Y)$$

$$N(1,25) = N(2,26) = N(3,27) = b(-XY^2 + XY^3)$$

$$N(1,28) = N(2,29) = N(3,30) = XY + 3Y^2 - 3X^2Y - 3XY^2 - 2Y^3 + 2X^3Y + 2XY^3$$

$$N(1,31) = N(2,32) = N(3,33) = a(XY - 2X^2Y + X^3Y)$$

$$N(1,34) = N(2,35) = N(3,36) = b(-Y^2 + XY^2 + Y^3 - XY^3)$$

Where the rest of the $N(I,J)$ not given above are all equal to zero.

$$B(1,1) = \frac{1}{a} \cdot (-Y - 6X + 6XY + 3Y^2 + 6X^2 - 6X^2Y - 2Y^3),$$

$$B(2,1) = 0, B(3,1) = \frac{1}{b} (-X - 6Y + 3X^2 + 6XY + 6Y^2 - 2X^3 - 6XY^2),$$

$$B(1,2) = 0, B(2,2) = \frac{1}{b} \left(1 + \frac{2}{R}\right) (-X - 6Y + 3X^2 + 6XY + 6Y^2 - 2X^3 -$$

$$6XY^2) - \frac{2}{a} \frac{\partial R}{\partial y} \cdot \frac{1}{R^2} \cdot (1 - XY - 3X^2 - 3Y^2 + 3X^2Y + 3XY^2 + 2X^3 + 2Y^3 -$$

$$2X^3Y - 2XY^3), B(3,2) = \frac{1}{a} \left(1 + \frac{2}{R}\right) (-Y - 6X + 6XY + 3Y^2 + 6X^2 - 6X^2Y - 2Y^3),$$

$$B(1,3) = -\frac{6}{a^2} \cdot (-1 + Y + 2X - 2XY), B(2,3) = \frac{1}{R} \cdot (1 -$$

$$XY - 3X^2 - 3Y^2 + 3X^2Y + 3XY^2 + 2X^3 + 2Y^3 - 2X^3Y - 2XY^3) -$$

$$\frac{6}{b^2} \cdot (-1 + X + 2Y - 2XY), B(3,3) = -\frac{2}{ab} \cdot (-1 + 6X + 6Y - 6X^2 - 6Y^2)$$

$$B(1,4) = 1 - Y - 4X + 4XY + 3X^2 - 3X^2Y, B(2,4) = 0,$$

$$B(3,4) = \frac{a}{b} \cdot (-X + 2X^2 - X^3),$$

$$B(1,5) = 0, B(2,5) = \frac{a}{b} \left(1 + \frac{2}{R}\right) (-X + 2X^2 - X^3) - \frac{2}{R^2} \frac{\partial R}{\partial y} \cdot$$

$$(X - XY - 2X^2 + 2X^2Y + X^3 - X^3Y), B(3,5) = \left(1 + \frac{2}{R}\right) (1 - Y - 4X + 4XY + 3X^2 - 3X^2Y),$$

$$B(1,6) = -\frac{2}{a} (-4 + 4Y + 6X - 6XY), B(2,6) = \frac{a}{R} \cdot (X - XY - 2X^2 -$$

$$2X^2Y + X^3 - X^3Y), B(3,6) = -\frac{2}{b} \cdot (-1 + 4X - 3X^2),$$

$$B(1,7) = \frac{b}{a} \cdot (-Y + 2Y^2 - Y^3), B(2,7) = 0, B(3,7) = 1 -$$

$$X - 4Y + 4XY + 3Y^2 - 3XY^2,$$

$$B(1,8)=0, B(2,8)=(1+\frac{2}{R})(1-X-4Y+4XY+3Y^2-3XY^2),$$

$$B(3,8)=\frac{b}{a}\cdot(1+\frac{2}{R})(-Y+2Y^2-Y^3),$$

$$B(1,9)=0, B(2,9)=\frac{b}{R}\cdot(Y-XY-2Y^2+2XY^2+Y^3-XY^3)-\frac{2}{b}\cdot(-4+4X+6Y-6XY), B(3,9)=-\frac{2}{a}\cdot(-1+4Y-3Y^2),$$

$$B(1,10)=\frac{1}{a}(Y+6X-6XY-3Y^2-6X^2+6X^2Y+2Y^3), B(2,10)=0,$$

$$B(3,10)=\frac{1}{b}\cdot(X-3X^2-6XY+2X^3+6XY^2),$$

$$B(1,11)=0, B(2,12)=\frac{1}{b}\cdot(1+\frac{2}{R})(X-3X^2-6XY+2X^3+6XY^2)-2\frac{\partial R}{\partial Y}\frac{1}{R^2}\cdot(XY+3X^2-3X^2Y-3XY^2-2X^3+2X^3Y+2XY^3),$$

$$B(3,11)=\frac{1}{a}\cdot(1+\frac{2}{R})(Y+6X-6XY-3Y^2-6X^2+6X^2Y+2Y^3),$$

$$B(1,12)=-6\frac{2}{a}\cdot(1-Y-2X+2XY), B(2,12)=\frac{1}{R}(XY+3X^2-$$

$$3X^2Y-3XY^2-2X^3+2X^3Y+2XY^3)-\frac{6}{b}\cdot(-X+2XY),$$

$$B(3,12)=-\frac{2}{ab}\cdot(1-6X-6Y+6X^2+6Y^2),$$

$$B(1,13)=-2X+2XY+3X^2-3X^2Y, B(2,13)=0,$$

$$B(3,13)=\frac{a}{b}\cdot(X^2-X^3),$$

$$B(1,14)=0, B(2,14)=\frac{a}{b}\cdot(1+\frac{2}{R})(X^2-X^3)-\frac{2}{R^2}\frac{\partial R}{\partial Y}\cdot$$

$$(-X^2+X^2Y+X^3-X^3Y), B(3,14)=(1+\frac{2}{R})(-2X+2XY+3X^2-3X^2Y),$$

$$B(1,15)=-\frac{2}{a}\cdot(-1+Y+3X-3XY), B(2,15)=\frac{a}{R}(-X^2+X^2Y+X^3-X^3Y)$$

$$B(3,15) = -\frac{2z}{b} (2X - 3X^2),$$

$$B(1,16) = \frac{b}{a} (Y - 2Y^2 + Y^3), \quad B(2,16) = 0, \quad B(3,16) = X - 4XY + 3XY^2,$$

$$B(1,17) = 0, \quad B(2,17) = (1 + \frac{z}{R})(X - 4XY + 3XY^2) - \frac{2b}{R^2} \frac{\partial R}{\partial Y} (XY - 2XY^2 + XY^3),$$

$$B(3,17) = \frac{b}{a} (1 + \frac{2z}{R})(Y - 2Y^2 + Y^3),$$

$$B(1,18) = 0, \quad B(2,18) = \frac{b}{R} (XY - 2XY^2 + XY^3) - \frac{z}{b} (-4X + 6XY),$$

$$B(3,18) = -\frac{2z}{a} (1 - 4Y + 3Y^2),$$

$$B(1,19) = \frac{1}{a} (-Y + 6XY + 3Y^2 - 6X^2Y - 2Y^3), \quad B(2,19) = 0,$$

$$B(3,19) = \frac{1}{b} (-X + 3X^2 + 6XY - 2X^3 - 6XY^2),$$

$$B(1,20) = 0, \quad B(2,20) = \frac{1}{b} (1 + \frac{z}{R}) (-X + 3X^2 + 6XY - 2X^3 - 6XY^2) -$$

$$\frac{z}{R} \frac{\partial R}{\partial Y} (-XY + 3X^2Y + 3XY^2 - 2X^3Y - 2XY^3), \quad B(3,20) = \frac{1}{a} (1 + \frac{2z}{R}) (-$$

$$-Y + 6XY + 3Y^2 - 6X^2Y - 2Y^3),$$

$$B(1,21) = -\frac{6z}{a^2} (Y - 2XY), \quad B(2,21) = \frac{1}{R} (-XY + 3X^2Y + 3XY^2 - 2X^3Y -$$

$$2XY^3) - \frac{6z}{b^2} (X - 2XY), \quad B(3,21) = -\frac{2z}{ab} (-1 + 6X + 6Y - 6X^2 - 6Y^2),$$

$$B(1,22) = -2XY + 3X^2Y, \quad B(2,22) = 0, \quad B(3,22) = \frac{a}{b} (-X^2 + X^3),$$

$$B(1,23) = 0, \quad B(2,23) = \frac{a}{b} (1 + \frac{z}{R}) (-X^2 + X^3) - \frac{2a}{R^2} \frac{\partial R}{\partial Y} (-X^2Y + X^3Y),$$

$$B(3,23) = (1 + \frac{2z}{R}) (-2XY + 3X^2Y),$$

$$B(1,24) = -\frac{z}{a} (-2Y + 6XY), \quad B(2,24) = \frac{a}{R} (-X^2Y + X^3Y),$$

$$B(3,24) = -\frac{2z}{b} (-2X + 3X^2),$$

$$B(1,25) = \frac{b}{a}(-Y^2 + Y^3), B(2,25) = 0, B(3,25) = -2XY + 3XY^2,$$

$$B(1,26) = 0, B(2,26) = (1 + \frac{2}{R})(-2XY + 3XY^2) - \frac{2b}{R^2} \frac{\partial R}{\partial Y}(-XY^2 + XY^3),$$

$$B(1,27) = 0, B(2,27) = \frac{b}{R}(-XY^2 + XY^3) - \frac{2}{b}(-2X + 6XY), B(3,27) = -\frac{22}{a}(-2Y + 3Y^2),$$

$$B(1,28) = \frac{1}{a}(Y - 6XY - 3Y^2 + 6X^2Y + 2Y^3), B(2,28) = 0, B(3,28) =$$

$$\frac{1}{b}(X + 6Y - 3X^2 - 6XY - 6Y^2 + 2X^3 + 6XY^2),$$

$$B(1,29) = 0, B(2,29) = \frac{1}{b}(1 + \frac{2}{R})(X + 6Y - 3X^2 - 6XY - 6Y^2 + 2X^3 + 6XY^2) - \frac{2}{R^2} \frac{\partial R}{\partial Y}(XY + 3Y^2 - 3X^2Y - 3XY^2 - 2Y^3 + 2X^3Y + 2XY^3),$$

$$B(3,29) = \frac{1}{a}(1 + \frac{2}{R})(Y - 6XY - 3Y^2 + 6X^2Y + 2Y^3),$$

$$B(1,30) = -\frac{62}{a^2}(-Y + 2XY), B(2,30) = \frac{1}{R}(XY + 3Y^2 - 3X^2Y -$$

$$3XY^2 - 2Y^3 + 2X^3Y + 2XY^3), B(3,30) = -\frac{22}{ab}(1 - 6X - 6Y + 6X^2 + 6Y^2),$$

$$B(1,31) = Y - 4XY + 3X^2Y, B(2,32) = 0, B(3,32) = \frac{a}{b}(X - 2X^2 + X^3),$$

$$B(1,32) = 0, B(2,32) = \frac{a}{b}(1 + \frac{2}{R})(X - 2X^2 + X^3) - \frac{2a}{R^2} \frac{\partial R}{\partial Y}(XY - 2X^2Y + X^3Y), B(3,32) = (1 + \frac{2}{R})(Y - 4XY + 3X^2Y),$$

$$B(1,33) = -\frac{2}{a}(-4Y + 6XY), B(2,33) = \frac{a}{R}(XY - 2X^2Y + X^3Y),$$

$$B(3,33) = -\frac{22}{b}(1 - 4X + 3X^2),$$

$$B(1,34) = \frac{b}{a}(Y^2 - Y^3), B(2,34) = 0, B(3,34) = -2Y + 2XY + 3Y^2 - 3XY^2,$$

$$B(1,35)=0, B(2,35)=(1+\frac{2}{R})(-2Y+2XY+3Y^2-3XY^2)-$$

$$\frac{2b}{R^2} \frac{\partial R}{\partial y} (-Y^2+XY^2+Y^3-XY^3), B(3,35)=\frac{b}{a}(1+\frac{2}{R})(Y^2-Y^3),$$

$$B(1,36)=0, B(2,36)=\frac{b}{R}(-Y^2+XY^2+Y^3-XY^3)-\frac{2}{b}(-2+2X+6Y-6XY), B(3,36)=-\frac{2}{a}(2Y-3Y^2).$$